M-FAN

BEDEK
ENGINEERING & DISTRIBUTION

AF09225 AC/DC Fan

92x92x25mm
AC100~240V Full range AC voltage input

NEW

General Specifications

- Frame Size..... 92×92×25mm
- Material..... Frame: Plastic (UL94V-0), Impeller: Plastic (UL94V-0)
  Lead Wire: UL1007 22# black Terminal: 2.5mm
- Motor..... AF-AC Frequency-Switching Fan Motor
- Input Voltage..... 100V~ 240V (50/60Hz) (AC & DC)
- Dielectric Strength.... 50/60Hz, 1500VAC 1Min. (between input terminal and frame)
- Expected Life..... Ball Bearing 50000hrs 40°C)
- Temperature Range... Operating temperature -10°C~+70°C (Non-condensing)
  Storage temperature -40°C~+70°C (Non-condensing)
- Sensor-Lead Wire..... FG Yellow, RD White, ⏚ Brown with UL1007 22#

Dimensions (Unit: mm)

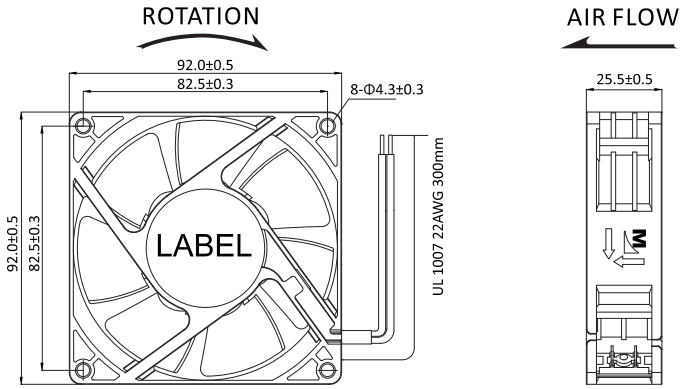

PQ Curve (At Rated Voltage)

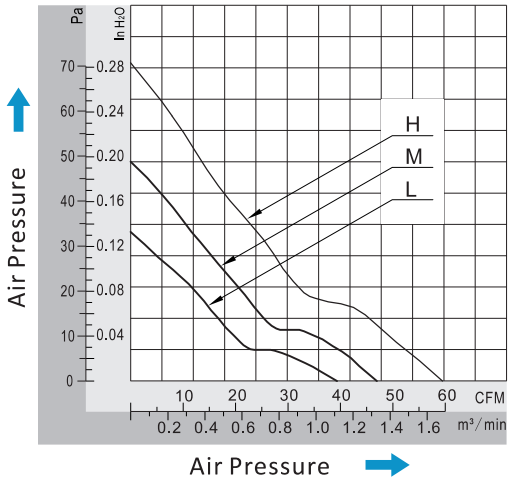

Mounting Panel Cutout (Unit: mm)

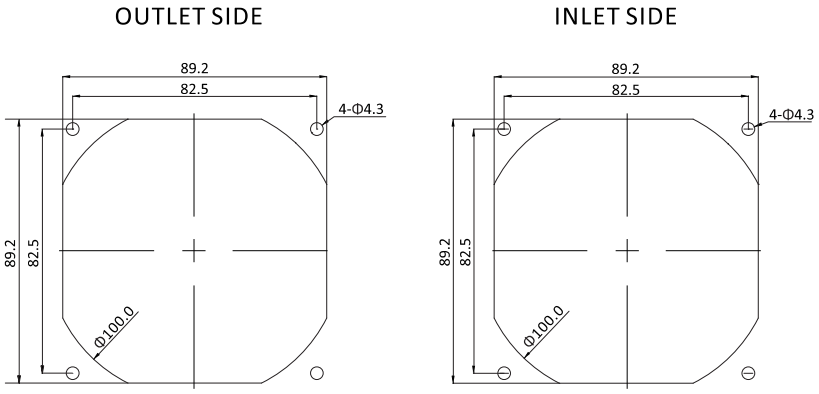

Safety Standards

RoHS

Fans Specials

FG AUTO RD IP54 Super energy-saving

Specifications

Ì ŎŇŇŎ	Bearing Type	Rated Voltage	Frequenz	Rated Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	DB/S	VAC & VDC	Hz	Amp	Watt	RPM	CFM	m³/min	Inch-H2O	PA	dB-A	g
AF09225B**HL(T)	Dual Ball	100~240	-	0.12	6,00	3500	59,9	1,695	0,28	70	48	103
AF09225B**ML(T)	Dual Ball	100~240	-	0.07	3,70	3000	49,4	1,398	0,20	50	45	103
AF09225B**LL(T)	Dual Ball	100~240	-	0.05	1,90	2500	39,5	1,118	0,14	35	41	103

Specifications are subject to change without notice.
Please visit our website www.bedek.de for further information and support.
M-FAN is a trademark of Shenzhen Huaxia Hengtai Electronic Co.,Ltd.